
Cattle Feeders

A completely portable, round modular cattle feeder, designed for durability, efficiency, ease of use and significantly cheaper transport.



CAPACITY: 9.5m3 DIAMETER: 4,284mm

HEIGHT: 2,720mm BASE WIDTH: 3,485mm

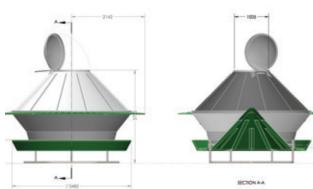

Pumps and Water Tank Accessories

Team Poly recommend Davey and ClayTech pumps.











RAINBANK EVO SYSTEM

- a submersible pup, switching device and optional filtration
- Sits neatly out of view in the
- top of the tank to reduce pipework. Ideal for metropolitan rainwater
- harvesting needs across homes garden irrigation and toilet blocks.
- Connections must be fitted by a licensed plumber

Underdeck Tanks



1000L

HEIGHT: 620mm WIDTH: **1,225mm** LENGTH: 2.420mm

2000L

HEIGHT: 960mm WIDTH: 1,225mm LENGTH: 2.420mm

Industrial Molasses Tanks

We offer a specialised consulting service for the supply of customfitted industrial tanks for a range of applications in the market sectors of industrial liquid storage, chemical storage, liquid feed and fertiliser



1.000L - 50.000L

- distribution service. Manufacturing sites in Queensland, New South

Wales, Victoria and

- South Australia. Tanks designed and manufactured to align specific industrial
- requirements. Full range of fittings and
- specifications. year pro rata warranty.

attachments fitted to your

Cartage Tanks SIZES 200L - 1,000L

- · All tanks 500L and above are baffled.
- All tanks feature sump. Tank feature moulded 50mm Outlet.
- · Screw on lid and breather are provided
- 5 year pro rata warranty (tank only).

| | A | |
|-------|---|--|
| eight | | |

| | Lengui | WIGHT | пеідпі | |
|-------|--------|--------|--------|----|
| 200L | 990mm | 610mm | 750mm | \$ |
| 300L | 1380mm | 610mm | 750mm | \$ |
| 500L | 1280mm | 820mm | 940mm | \$ |
| 1000L | 1530mm | 1200mm | 1060mm | \$ |
| | | | | |

Stock Storage Tanks

900L

WALL HEIGHT: 900mm TOTAL HEIGHT: 1,200mm DIAMETER: 1.300mm

2300L

WALL HEIGHT: 970mm TOTAL HEIGHT: 1,200mm DIAMETER: 1,950mm



Storage tanks are designed to be stackable when empty and outlets can be installed in any position.

Delivery of your Team Poly water tank

When ordering large Team Poly Water Tanks, 9,000L and above, please complete the following checklist.

- 1. Delivery site / access free from overhead obstruction (e.g. Overhanging tree branches or power lines) 5.3 metres high minimum clearance of flat level access.
- Sufficient parking and turning circle for truck and trailer 19m L x 5.3m H x 2.8m W
- 3. Ground surface flat, firm and dry to avoid the truck or trailer sinking or shifting during delivery.
- Identify and advise Team Poly of any hazardous or unsafe work environment conditions on site.

For occupational health and safety reasons there must be a sufficient number of adult able bodied persons available to assist the driver with delivery of your tank (refer table below). Customers should also be aware that insufficient labour on site may delay delivery or incur additional delivery costs.

| NUMBER OF ADULT PEOPLE REQUIRED (excluding the Team Poly driver) | LITRES | GALLONS | |
|--|---|------------------------|--|
| 1 person | Tanks up to and including 9,000L (includes Slimlines) | 2,000 gallons | |
| 2 people | 13,500 litre | 3,000 gallons | |
| 3 people | 22,500 – 27,000 litres | 5,000 - 6,000 gallons | |
| 4 people | 40,950 – 50,050 litres | 9,000 – 11,000 gallons | |

Recommended Site Preparation

Correct site preparation is essential to ensure a long and troublefree life for your tank.

It is essential to have your water tank on a FLAT LEVEL COMPACTED BASE. The base of your water tank must be fully supported at all times.

Concrete slab must be at least 25mpa and 100mm (4") thick with F62 mesh halfway through the mix. It should be screeded flat and level with no high or low spots. The finished surface should have a trowelled finish.

Crusher dust

Crusher dust bases must be 150mm (6") wider than diameter of the water tank and prepared as follows:

- Remove at least 100mm (4") of natural earth, ensuring the base is
- Refill with at least 75mm (3") of crusher dust thoroughly mixed with dry cement powder for a 4m (13') base we suggest 2-3 bags of cement powder
- Once spread, thoroughly compact the crusher dust with suitable compacting equipment, not by any other means.
- Thoroughly screed the surface and ensure the finished surface is perfectly FLAT AND LEVEL and free of stones, tree roots, etc. Do not water to set the cement powder, natural moisture will do this when your tank is in position.

Note: Sand is not acceptable.

Inspect the base regularly checking for and rectifying any undermining by water run-off or animals burrowing such as toads and mice.

Molasses tanks must have a concrete slab or suitably constructed tank stand with flat level deck to be considered for warrantv.

Warranty

*See the Team Poly website for details of the warranty. www.teampoly.com.au



Team Poly Tanks Pty Ltd. ABN 79 162065778 30 Waddikee Rd, Lonsdale SA 5160 1300 658 961

www.teampoly.com.au

Overflow must be piped away from base to prevent undermining 3-4" (75-100mm) of compacted crusher dust or concrete pad.

Fatigue Management Policy


Team Poly is committed to meeting our duty of care under the Chain of Responsibility and Compliance and Enforcement Legislation.

Activities that may contribute to a breach include, but is not limited to:

- · Exerting pressure on drivers to overload or speed. Placing unrealistic delivery time frames on drivers.
- Accepting overloaded trailers.
- · Accepting inadequate restrained loads.
- · Delays during loading and unloading.

With the support and co-operation of all parties, we can ensure we all work towards improving safety while encouraging a culture of compliance and continuous improvement in the transport industry.

Agent

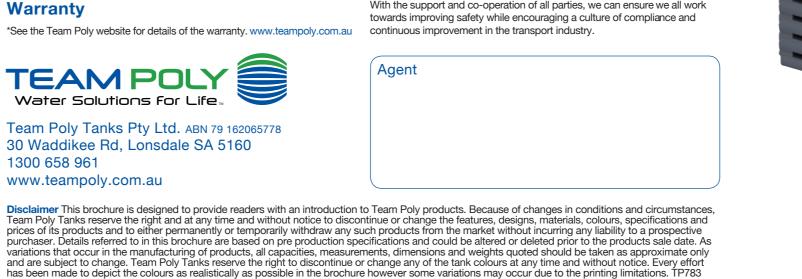














Team Poly has manufactured and distributed over 1 million water tanks throughout Australia since 1990. This provides us with a wealth of experience and the ability to understand your needs whether you are a home owner, tradesperson, farmer or industrial.

Team Poly offers a wide range of styles and water solutions. We manufacture traditional round tanks from 545L to 50,050L, slimline tanks, industrial tanks, cartage tanks and troughs. We also have a great range of accessories and pumps.

Why buy a Team Poly Tank?


- Team Poly tanks are made from pure Australian food grade polyethylene.
- Over 20 years of experience in manufacturing water tanks
- Tanks are manufactured and certified to the Australian standard, AS4766
- Many Colourbond® tank colours to compliment houses, sheds, fences or any other structure
- 25 year pro rata warranty on all round tanks*



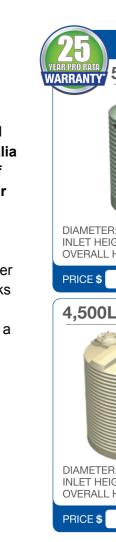





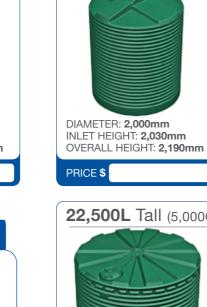



SL2 1,000L (220G)


DIAMETER: 850mm

PRICE \$

INLET HEIGHT: 1,900mm

5,400L (1200G)

OVERALL HEIGHT: 1,900mm

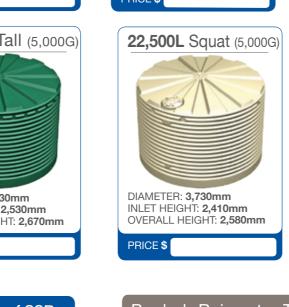

1,000L (220G)

DIAMETER: 900mm

8,000L (1800G)

DIAMETER: 2,350mm

INLET HEIGHT: 2,110mm

OVERALL HEIGHT: 2.300mm

PRICE \$

INLET HEIGHT: 2,020mm

OVERALL HEIGHT: 2,020mm



1,600L (350G)

DIAMETER: 1,220mm

PRICE \$

INLET HEIGHT: 1,825mm

OVERALL HEIGHT: 1,825mm

9.000L Tall (2000G)

DIAMETER: 2,570mm

INLET HEIGHT: 2,180mm



2,300L (500G)

DIAMETER: 1,720mm

DIAMETER: 2,890mm

INLET HEIGHT: 1,570mm

PRICE \$

INLET HEIGHT: 1,365mm

OVERALL HEIGHT: 1,365mm

9,000L Squat (2000G)



3,000L (650G)

DIAMETER: 1,440mm

PRICE \$


INLET HEIGHT: 2,260mm

13,500L (3000G)

DIAMETER: 2,805mm

INLET HEIGHT: 2,360mm

OVERALL HEIGHT: 2,260mm

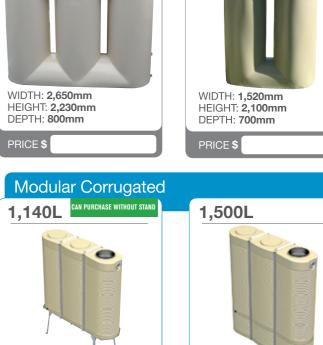

WIDTH: 1.800mm

HEIGHT: 2,000mm

DEPTH: 500mm

Agua Spring Range

WIDTH: 1,090mm

HEIGHT: 1,780mm

DEPTH: 500mm

RICE \$

3,500L

1000L



2,500L

WIDTH: **2,400mm**

HEIGHT: 2,000mm

DEPTH: 600mm

RICE \$

2000L



OVERFLOW STRAINER

90mm

INCLUDED WITH ALL TANKS

Fittings and Accessories













WIDTH:1,800mm

DEPTH: 500mm

PRICE \$

HEIGHT: 1,570mm

HEIGHT + STAND: 2,090mm



